

# Pneumatic vices for cylinders and fire extinguishers

## AIR Series



AIR 15/C

### CARATTERISTICHE

AIR series vices are designed for the efficient clamping of cylinders and fire extinguishers, thus facilitating maintenance operations (punching, screwing/unscrewing valves, etc.).

The AIR15 model is indicated for powder or premixed foam extinguishers and cylinders up to 220 mm in diameter and whenever valves are coupled to the extinguisher with an O-ring sealing.

The AIR5 model, on the other hand, is designed for cylinders up to 410 mm in diameter (depending on the model) and for all maintenance operations on CO2 fire extinguishers and technical gas cylinders.

They can be equipped with a self-supporting base, or supplied with only the enclosing structure, prepared for workbench mounting.

Also available is the AIR15 BAS model, whose vice can rotate 90° or 180°.

### COMPONENTS AND DEVICES


- > Pneumatic cylinder
- > Rubber covered jaws
- > Two-hand operated closing device with CE certification
- > Pressure regulation kit for clamping force adjustment (AIR5)

### STANDARD EQUIPMENT


- > Mobile and removable base for portable extinguishers and small cylinders
- > User manual

# Pneumatic vices for cylinders and fire extinguishers

AIR 5

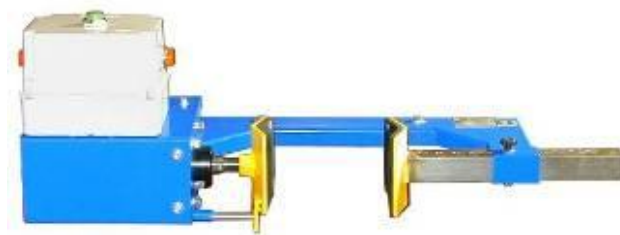

AIR 15

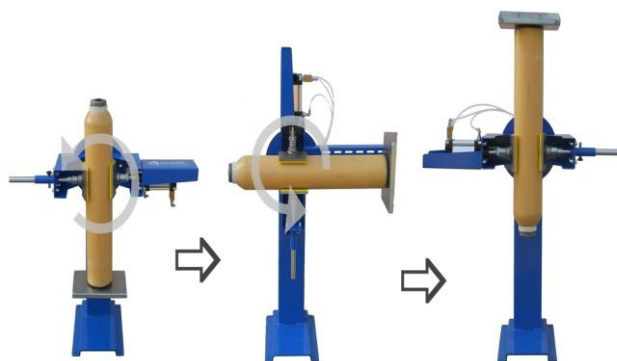

AIR 15/C

## TECHNICAL DATA

MODEL	AIR15	AIR15/C AUTOPORT.	AIR4	AIR5 AUTOPORT.	AIR5/S410
CATALOGUE ITEM	MZAP060	MZAP065	MZAP001	MZAP015	MZAP030
MINIMUM CLAMPING DIAMETER (mm)	70	70	70	70	180
MAXIMUM CLAMPING DIAMETER (mm)	220	220	320	220	410
MAX TECHNICAL INSTRUMENT AIR (bar)	10	10	10	10	10
MAX TORQUE	120 N/m	120 N/m	350 N/m	350 N/m	350 N/m
DCP AND FOAM EXT.	Yes	Yes	Yes	Yes	Yes
CO <sub>2</sub> EXTINGUISHERS	No	No	No	Yes	Yes
INDUSTRIAL GASES CYL.	No	No	No	Yes	Yes

> PER MAGGIORI INFORMAZIONI:  
FOR FURTHER INFORMATION CONTACT:  
POUR INFORMATIONS CONTACTER:

**DAMOTEK S.r.l.**

Via Avv. Giovanni Agnelli, 10 12033 MORETTA (CN) ITALY

Tel: +39 0172 911235

Fax: +39 0172 911322

[www.damotek.com](http://www.damotek.com)  
[info@damotek.com](mailto:info@damotek.com)

